


# SPREADER PLATES

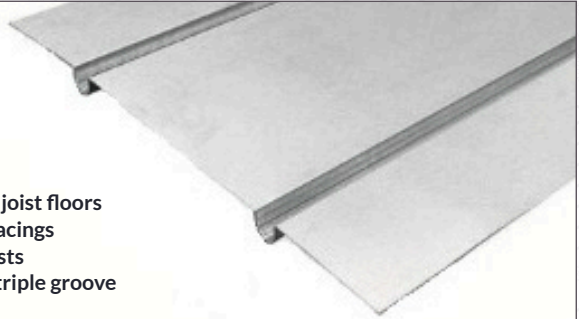

## Key Benefits

- Ideal for use between timber joist floors
- Provides ready made pipe spacings
- Plates sit flush with top of joists
- Plates available in double or triple groove

## SPREADER PLATE

400mm spreader plates come in two options - **3 channel** giving 150mm pipe spacing or **2 channel** giving 200mm pipe spacing.

<b>400 Double Spreader</b>	Thickness:	0.5mm
Dimensions:	Width:	395mm
	Length:	1000mm
	Pipe Centres:	200mm
<b>400 Triple Spreader</b>	Thickness:	0.5mm
Dimensions:	Width:	395mm
	Length:	1000mm
	Pipe Centres:	150mm

	Wood Floor	Carpet 1.5 TOG/10mm ply
<b>Flow/Return Temp</b>	Heat Output W/m <sup>2</sup>	
50/45	49	43
45/40	40	35
40/35	31	27
35/30	22	19

**Not allowed as per BS EN 1264.**

Typical heat outputs based upon BS EN 1264 20°C room temperature, Delta T5. Due to the variability of parameters that effect the heat output of an underfloor heating system i.e. flow temperature, pipe spacings, floor coverings and design conditions.



Therm

EXPLORE THE *Warmth*