




Therm

SL PUMP CONTROL SET

Single-loop underfloor heating with thermostatic mixing valve

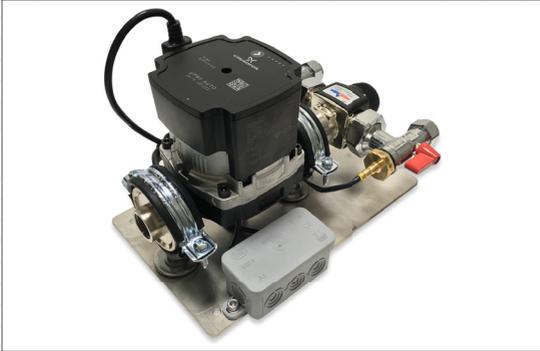

Technical Specifications

KV: 1.6 (Up to 90sqm / 5kW)

Temperature Range: 35°C - 60°C

Max Temperature Range:

Continuously = 95°C / Temporarily = 100°C

Maximum Supply Pressure: 10 Bar


Optional Extras

- Eurocone Connection Fittings

Product Information

- 'A' rated Grundfos UPM3 Auto pump
- Assembled in the UK: pre-tested, packaged and ready for instant installation
- Wall mounting plate as standard
- Fitted temperature switch (40°C standard)
- In-built primary isolation valves
- Therm 35-60 UFH thermostatic mixing valve
- In-built bypass
- Pre-wired pump terminal box
- 2 Year warranty

Item	Description	Qty
1	Therm 35-60 Thermostatic Mixing Valve	1
2	Isolation Ball Valve	2
3	½" BSP Female Adaptor	1
4	Temperature Switch 40°C	1
5	1" BSP X 1 ½" Flange Adaptor	1
6	1 ½" Pump Flange Nut	1
7	Grundfos UPM3 Auto Pump	1
8	½" BSP Female Adaptor	1
9	½" Compression Connections	1
10	Junction Box	1

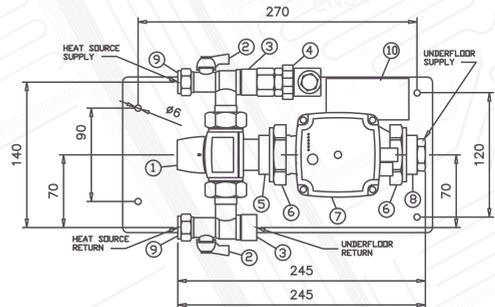

EXPLORE THE *Warmth*