



T4 PUMP CONTROL SET

Underfloor heating with thermostatic mixing valve



Technical Specifications

KV: 3.4Kv (Up to 220sqm / 18kW)

Temperature Range: 20°C - 55°C

Max Temperature Range:

Continuously = 95°C / Temporarily = 100°C

Maximum Supply Pressure: 10 Bar


Optional Extras

- Primary Isolation Valves
- Safety Temperature Switch
- Manifold Isolation Valves
- Compression Fittings

Product Information

- 20°C - 55°C temperature range suited for force screed drying in accordance with (BS1264)
- 'A' rated Grundfos UPM3 Auto pump
- Integrated check valves for easy filling
- Temperature gauge
- Assembled in the UK: pre-tested, packaged and ready for instant installation
- 2 Year warranty
- Fully reversible (Left or Right sided manifold)
- Side or bottom entry connections
- Available in 200mm, 210mm and 225mm manifold connection centers

Item	Description	Qty
1	Grundfos UPM3 Auto Pump	1
2	Thermostatic Mixing Valve	1
3	Flow / Return Elbow	1
4	2mm Rubber Washer	2
5	1 1/2" Rapid Connection Nut	2
6	Elbow Flanged	1
7	3/4" Female BSP Flow and Return	2
8	3/8" Pocket	1
9	Temperature Gauge	1
R	Return from manifold / flow to heat source	N/A
H	Flow from heat source	N/A

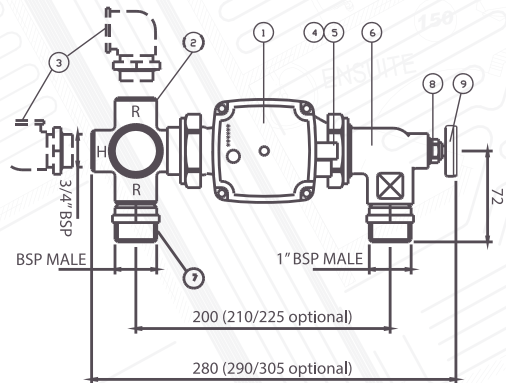

*Please note - Primary Isolation Valves are an optional extra.

EXPLORE THE *Warmth*