

# VOGUE MAX COMBI

26 32 40kW



NOx class 6



Premium components



Halo Wi-Fi & RF control compatible



Ideal System Filter included to maintain and protect your heating system



Simple to install & service




Easy to use full colour display



Frost protection



Stainless steel heat exchanger



**UP TO £55** EARN INSTALLER CONNECT POINTS FOR EVERY VOGUE MAX COMBI YOU REGISTER



\*Subject to terms and conditions. 12 year parts and labour warranty available to Max Accredited Installers. 10 year parts and labour warranty available as standard when registered within 30 days of installation.

# Features & specification

## PREMIUM QUALITY COMPONENTS

- Hydrobloc incorporating a 24V stepper for enhanced reliability
- Large 10 litre expansion vessel
- Stainless steel heat exchanger
- Low energy modulating Grundfos pump
- 24V gas valve


## END USER BENEFITS

- LPG conversions available on all outputs
- Backlit 3.5" LCD full colour display
- Multi-function buttons for simplified end user operation
- Up to 7:1 modulation
- Service display and installer phone number input
- Rotary control for easier user operation
- Stylish aesthetics with full width door complete with damped opening

## EASY TO INSTALL AND SERVICE

- Low boiler lift weight from 32.4kg
- Pre-wired mains lead (2m)
- Cool burner door technology
- Long maximum flue lengths with easy access sampling points
- Easy to read pressure gauge
- Uniform control opening across all Ideal Vogue and Logic boilers
- Control box with push-in cable clamps

## Clearances & dimensions

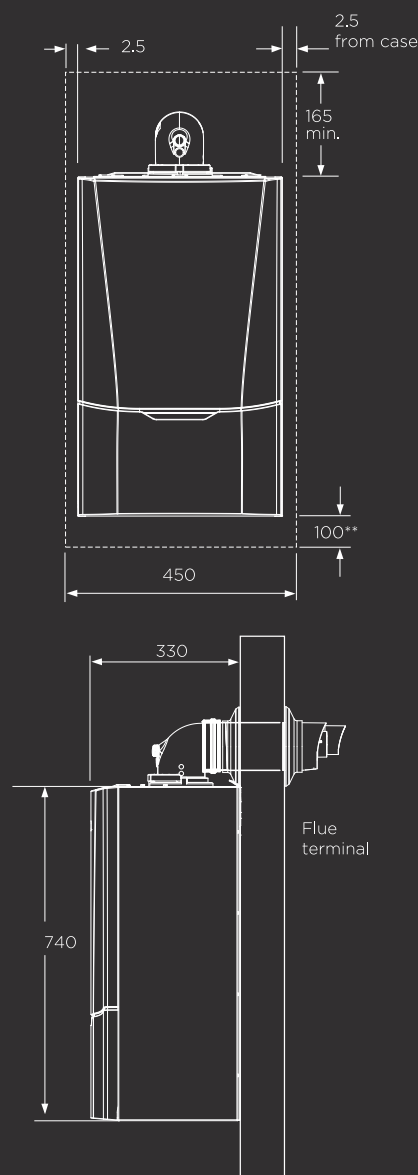

Dimensions in mm.

## Technical specification

VOGUE MAX COMBI MODELS	26	32	40
Weight (packaged) kg	40.1	41.4	43.4
Max installation weight kg	32.4	33.8	35.4
CH output (kW) min/max @ 70°C	3.7 - 18.0	4.6 - 26.0	5.7 - 32.0
CH output (kW) min/max @ 40°C	4.0 - 19.3	4.9 - 27.9	6.1 - 34.3
DHW output (kW) max	26	32	40
DHW flow rate l/min. 35°C rise	10.6	13.1	16.4
SEDBUK rating (2005) %	91	91.1	91
SEDBUK rating (2009/2012) %	89.1	89.2	89.1
NOx classification	CLASS 6	CLASS 6	CLASS 6
LPG conversion	Yes	Yes	Yes
Max horizontal flue	10m	8m	8m
Max vertical flue	10m	10m	10m
Seasonal space heating efficiency class	A	A	A
Seasonal space heating energy efficiency $\eta_s$ %	93	93	93
Sound power level, indoors $L_{WA}$ dB	47	50	49
Water heating energy efficiency class	A	A	A

T: 01482 492251 E: [ideal@idealheating.com](mailto:ideal@idealheating.com)

Ideal Heating, PO Box 103, National Avenue, Kingston upon Hull, East Yorkshire, HU5 4JN.

Clearances & dimensions note: The minimum front clearance when built into a cupboard is 5mm from the cupboard door but 450mm overall clearance with the cupboard door open is required for servicing.  
\*Bottom clearance after installation can be reduced to 5mm. However, 100mm is required for servicing.